




AWARDS



LULLABY

DESIGN FABRIZIO CRISÀ

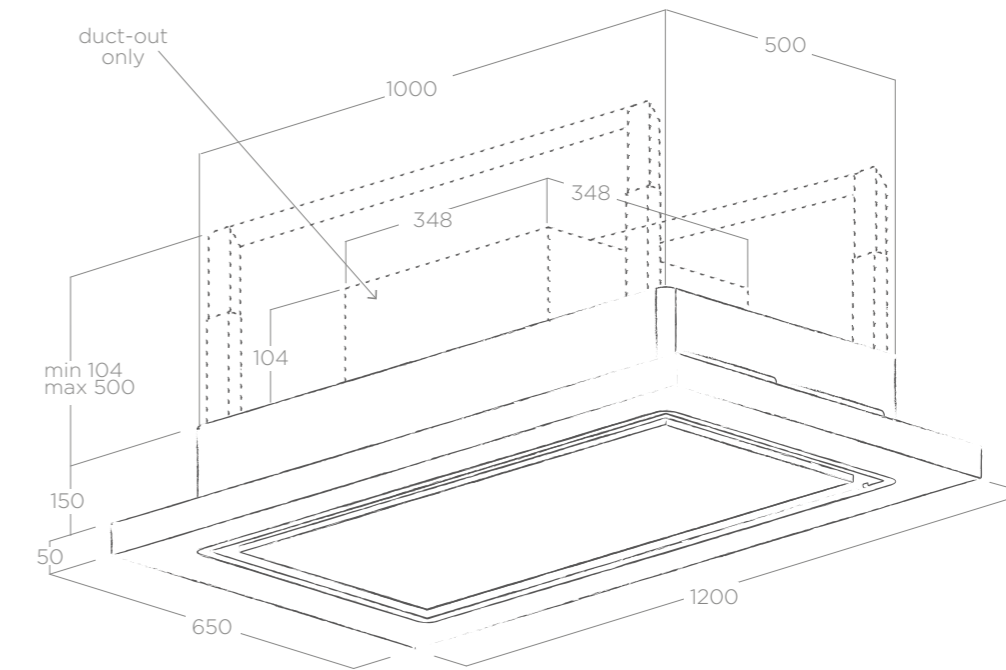

FALSE CEILING NEEDED
ONLY FOR DUCT-OUT VERSION
CUT 470X960



TUNE WHITE



DIM LIGHT



SMART
INSTALLATION



REVOLUTION
FILTER



KG 38,6



KG 43,6*



Accessori luce a pag. 166/168
Lighting accessories on page 166/168



Kit mensola a pag. 224
Shelf kit on page 224



LIGHTING



SILENCE



SPECIAL
MATERIAL



ENERGY
CLASS

CEILING

SCHEDA TECNICA TECHNICAL FEATURES

Misure Size	120x65 cm
Versione Version	Aspirante Duct-out - Filtrante Filtering
Finiture Finish	Legno laccato bianco + acciaio inox, rovere naturale + bianco effetto soft touch White lacquered wood + stainless steel, natural oak + White soft touch effect

ILLUMINAZIONE LIGHTING

Tipo Type	Pannello led 28 W led panel 28 W
Intensità Intensity	1123 LUX
Temperatura Temperature	2400 - 5000 K

PERFORMANCE PERFORMANCE

Comandi Controls	Radiocomando 3V + 2I 3S + 2B Remote control
Portata intensiva Booster airflow	770 m ³ /h - 730 m ³ /h (*)
Livello sonoro Noise level	53 db(A) - 64 db(A) (*)
Assorbimento totale Total absorption	188 W - 468W (*)
Uscita Duct size	150 mm
Classe energetica Energy class	A (A+/E)

Filtro grassi alluminio incluso Grease aluminium Filter included
Revolution filter incluso Revolution filter included

ACCESSORI ACCESSORIES

Revolution filter Revolution filter	KIT0147861
Filtro fibra carbone Carbon fibre filter	KIT0147856
Kit mensola legno Whood shelf kit	KIT0147858
Kit mensola bianca White shelf kit	KIT0147859
Radiocomando bianco White remote control	KIT0121468
Radiocomando nero Black remote control	KIT0121469
Dimmer Kit Kit Dimmer	KIT0147878



Radiocomando incluso. Estetiche a pag. 235.
Kit remote control included. See page 235 for available design.



Approfondimento a pagina seguente
More details on next page

MODELLI MODELS

LULLABY WH WOOD/A/120	PRF0146227
LULLABY WOOD/A/120	PRF0146229
LULLABY WH WOOD/F/120 (*)	PRF0146226
LULLABY WOOD/F/120 (*)	PRF0146225

MODULAR SYSTEM

CAPPA
HOOD



MENSOLA AGGIUNTIVA
ADDITIONAL SHELF



LUCE 01 / LUCE 02
BULB 01 / BULB 02

Il design di Lullaby è pensato per accogliere punti luce secondari. Cavi in tessuto intrecciato di vari colori, in acciaio, in rame o in corda, portalampada in materiale ceramico, in rame o in legno, ampie lampade LED a bulbo dalla tonalità calda, sono solo alcuni esempi degli accessori disponibili.

The aim of the Lullaby design is to integrate secondary outlets. Cables in various coloured woven fabric, in steel, copper or rope, a lamp holder in ceramic, copper or wood, large LED light bulbs with warm tones, are just a few examples of the available accessories.



CEILING




MENSOLE SHELVES

Lullaby è nata per fondersi in modo naturale con l'architettura in cui è inserita. L'aggiunta di una o più mensole accessorie da 80 cm l'una, in legno di rovere o bianco laccato, consentono di personalizzare l'estetica del prodotto.

Lullaby has been designed to naturally blend in with the architectural space in which it is inserted. The addition of one or more ancillary shelves, each 80 cm, in either oak or lacquered white wood, offers the possibility to personalise the product exterior.


MENSOLA AGGIUNTIVA
ADDITIONAL SHELF



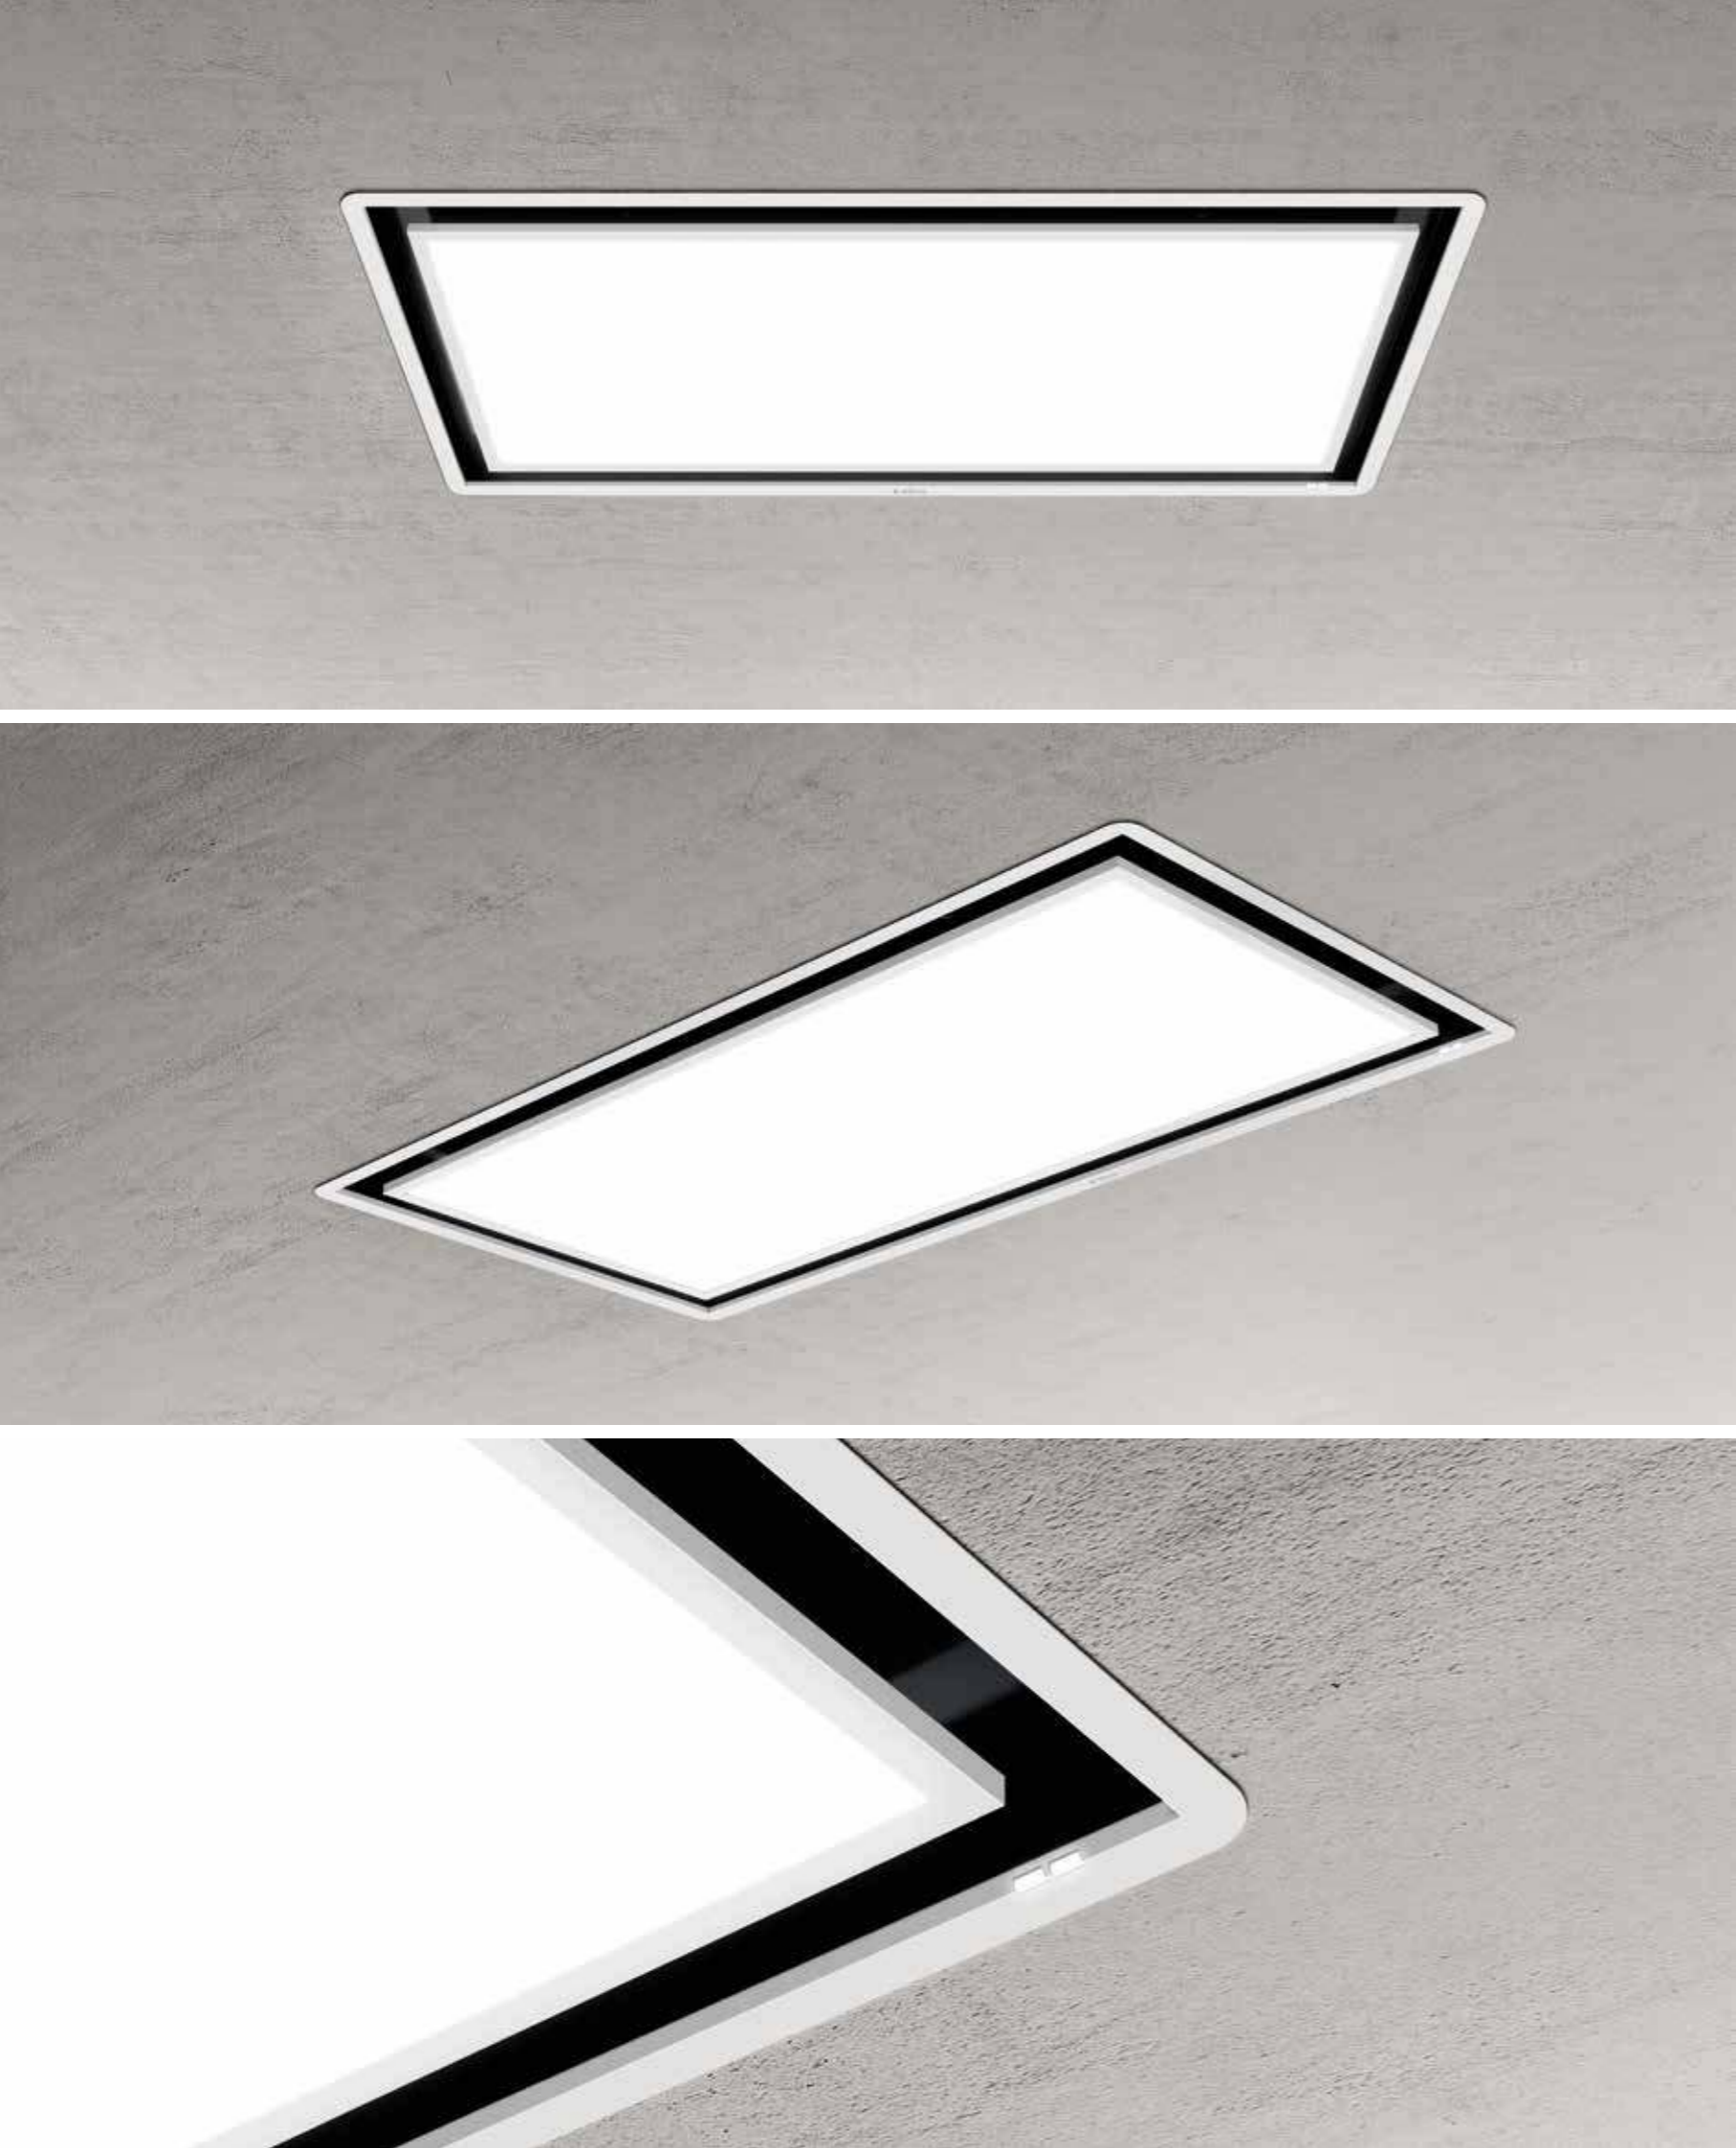

SKYDOME

DESIGN FABRIZIO CRISÀ

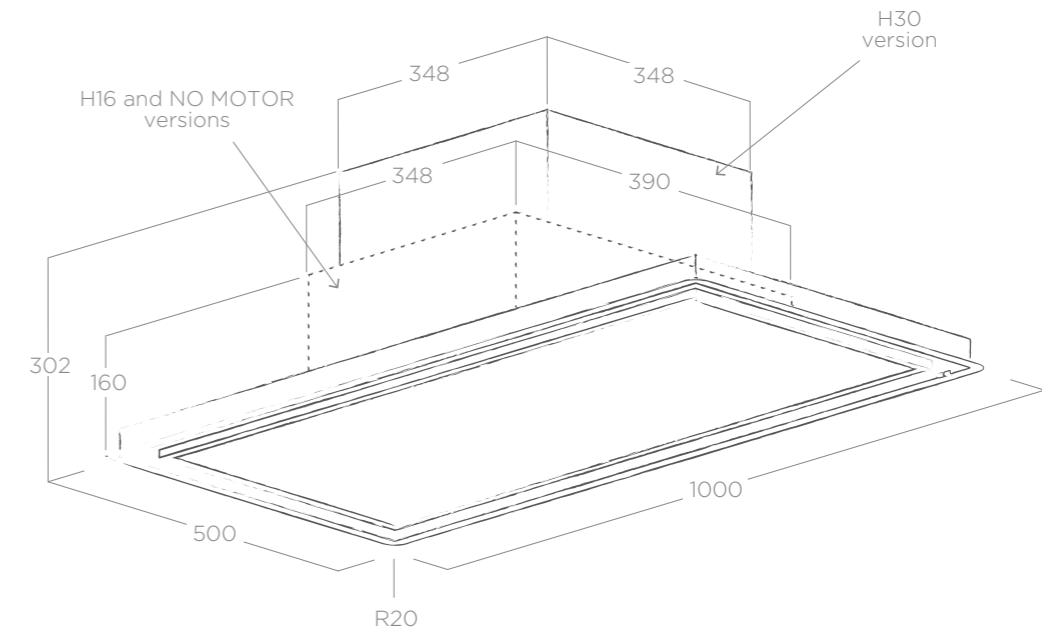

FALSE CEILING CUT: 480X980



Accessori luce a pag. 166/168
Lighting accessories on page 166/168

S.E.I System/Installazione salvaspazio a pag. 170
S.E.I System/Space-saving installation on page 170



LIGHTING



SILENCE



LONG LIFE FILTER



ENERGY CLASS

CEILING

SCHEDA TECNICA TECHNICAL FEATURES

Misure Size	100X50 cm	
Versione Version	Aspirante Duct-out	
Finiture Finish	Bianco, White	
ILLUMINAZIONE LIGHTING		
Tipo Type	Pannello led 28 W led panel 28 W	
Intensità Intensity	1123 LUX	
Temperatura Temperature	2400 - 5000 K	
PERFORMANCE PERFORMANCE		
Comandi Controls	H16	H30
	Radiocomando 3V+2I 3S+2B Remote Control	Radiocomando 3V+2I 3S+2B Remote Control
Portata intensiva Booster airflow	750 m ³ /h	770 m ³ /h
Livello sonoro Noise level	68 db(A)	53 db(A)
Assorbimento totale Total absorption	293 W	188 W
Uscita Duct size	220x90 mm	150 mm
Classe energetica Energy class	A (A**/E)	A (A**/E)

ACCESSORI ACCESSORIES

Kit filtrante Recycling kit H30	KIT0148449
Kit filtrante Recycling kit H16	KIT0148450
Radiocomando bianco White remote control	KIT0121468
Radiocomando nero Black remote control	KIT0121469
Motore remoto interno Internal remote motor	KIT0147879
Motore esterno a muro Wall external motor	KIT0147880
Motore esterno a tetto Roof external motor	KIT0147881
Motore esterno a tetto inclinato Inclined Roof external motor	KIT0147882
Dimmer Kit Kit Dimmer	KIT0147878

Radiocomando incluso. Estetiche a pag. 235.
Kit remote control included. See page 235 for available design.

Motori remoti a pag. 223
Remote motor on page 223

MODELLI MODELS


SKYDOME H16 A/100	PRF0147735
SKYDOME H30 A/100	PRF0146232
SKYDOME NO MOTOR A/100	PRF0146230

Filtro grassi alluminio incluso Grease aluminium Filter included



HILIGHT

DESIGN FABRIZIO CRISÀ

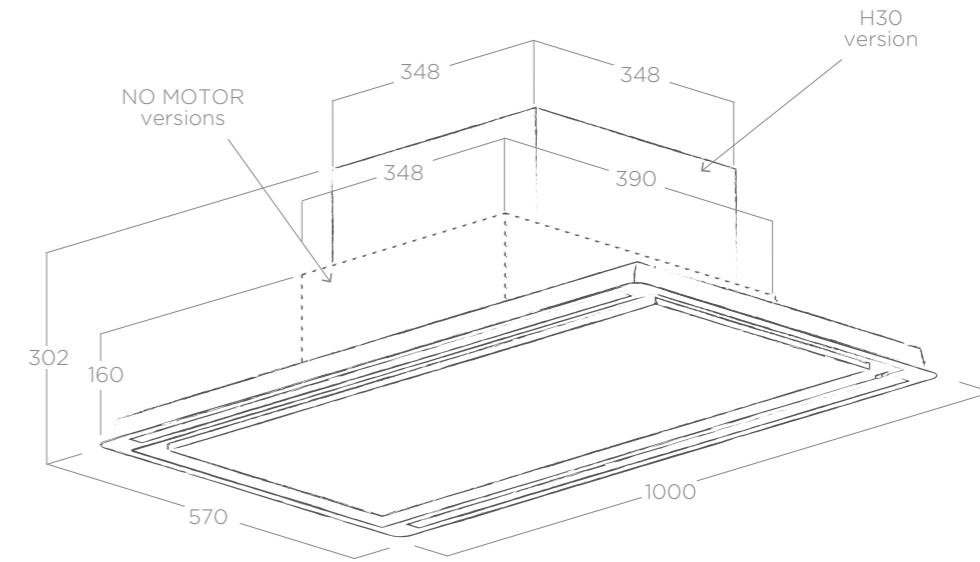

FALSE CEILING CUT: 550X980



Accessori luce a pag. 166/168
Lighting accessories on page 166/168

S.E.I System/Installazione salvaspazio a pag.170
S.E.I System/Space-saving installation on page 170



SILENCE



LIGHTING



LONG LIFE FILTER



ENERGY CLASS

CEILING

SCHEDA TECNICA TECHNICAL FEATURES

Misure Size 100 x 50 cm
Versione Version Aspirante Duct-out
Finiture Finish Bianco + cornice bianca, acciaio inox
White + white frame, stainless steel

ILLUMINAZIONE LIGHTING

Tipo Type STRIP LED 2 x 14 W
Intensità Intensity 563 LUX
Temperatura Temperature 2700-5000 K

PERFORMANCE PERFORMANCE

Comandi Controls Radiocomando 3V+2I
3S+2B Remote Control
Portata intensiva Booster airflow 770 m³/h
Livello sonoro Noise level 53 db(A)
Assorbimento totale Total absorption 188 W
Uscita Duct size 150 mm
Classe energetica Energy class A (A++/E)

Filtro grassi alluminio incluso Grease aluminium Filter included

ACCESSORI ACCESSORIES

Kit filtrante Recycling kit H30 KIT0148449
Radiocomando bianco White remote control KIT0121468
Radiocomando nero Black remote control KIT0121469
Motore remoto interno Internal remote motor KIT0147879
Motore esterno a muro Wall external motor KIT0147880
Motore esterno a tetto Roof external motor KIT0147881
Motore esterno a tetto inclinato Inclined Roof external motor KIT0147882
Dimmer Kit Kit Dimmer KIT0147878

Radiocomando incluso. Estetiche a pag. 235.
Kit remote control included. See page 235 for available design.

Motori remoti a pag. 223
Remote motor on page 223


MODELLI MODELS

HILIGHT H30 IX/A/100 PRF0146245
HILIGHT H30 WH/A/100 PRF0146246
HILIGHT NO MOTOR IX/A/100 PRF0146247
HILIGHT NO MOTOR WH/A/100 PRF0146248






Modello unico e personalizzabile secondo le esigenze del cliente. Due le versioni disponibili: pannellabile con cartongesso (spessore di 9 mm) o acciaio inox bianco verniciabile. Cartongesso non compreso nella confezione. Le immagini presentate sono esempi di estetiche esclusivamente dimostrative.
 Unique model that can be customized according to the customer's needs. Two versions available: with plasterboard panels (9mm thick) or paintable steel. Drywall not included in the packaging. The images shown are only examples of demonstration designs.

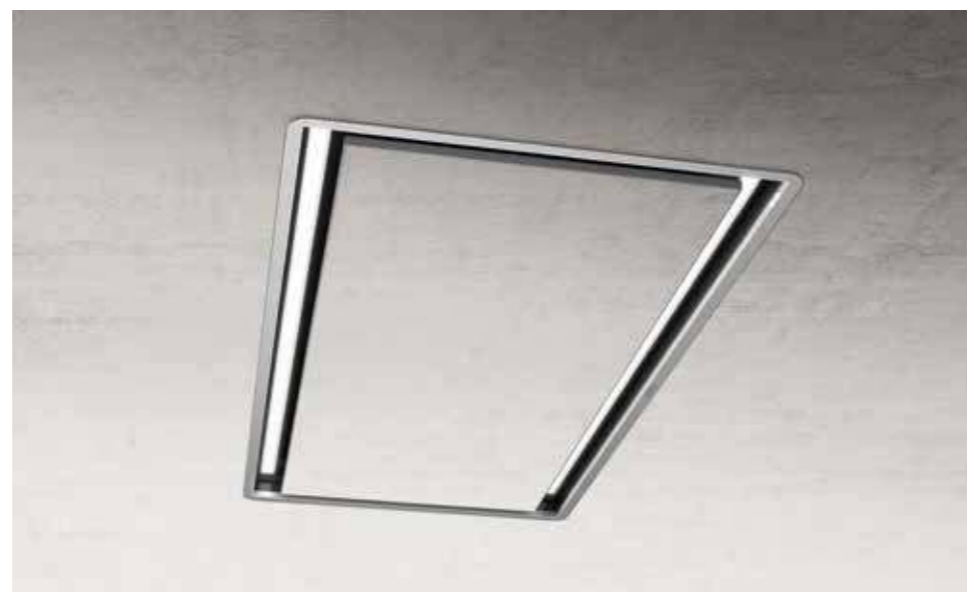

ILLUSION

DESIGN FABRIZIO CRISÀ

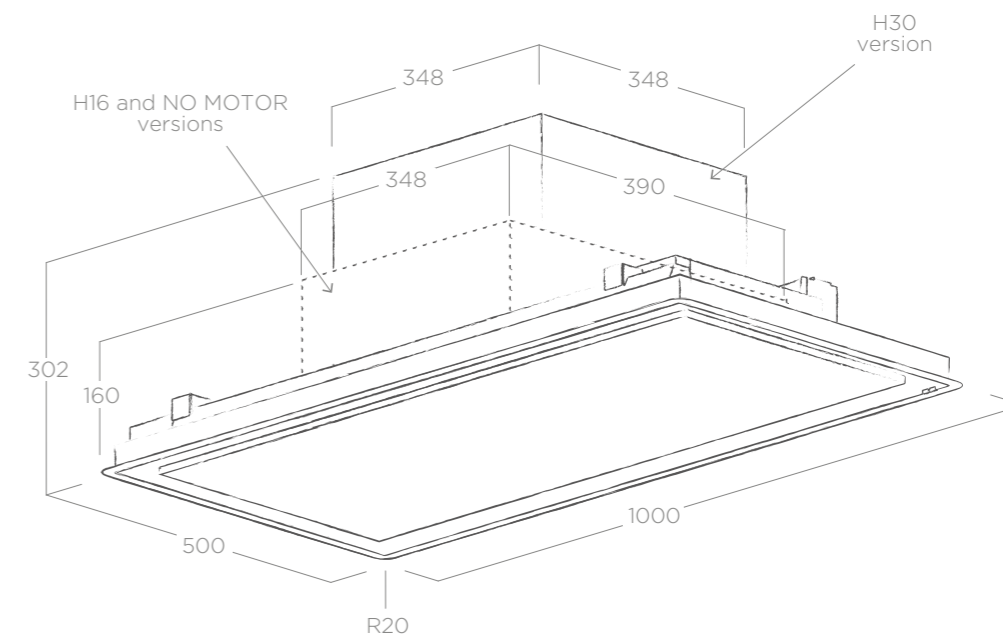

Accessori luce a pag. 166/168
Lighting accessories on page 166/168



S.E.I System/Installazione salvaspazio a pag. 170
S.E.I System/Space-saving installation on page 170



SILENCE



LIGHTING



SPECIAL MATERIAL



ENERGY CLASS

CEILING

SCHEDA TECNICA TECHNICAL FEATURES

Misure Size	100 x 50 cm
Versione Version	Aspirante Duct-out
Finiture Finish	Bianco + cornice bianca, pannellabile con cartongesso (non incluso) + acciaio inox White + white frame, panelable with drywall (not included) + stainless steel frame

ILLUMINAZIONE LIGHTING	
Tipo Type	STRIP LED 2 x 14 W
Intensità Intensity	563 LUX
Temperatura Temperature	2700-5000 K

PERFORMANCE PERFORMANCE		
	H16	H30
Comandi Controls	Radiocomando 3V+2I 3S+2B Remote Control	Radiocomando 3V+2I 3S+2B Remote Control
Portata intensiva Booster airflow	750 m ³ /h	770 m ³ /h
Livello sonoro Noise level	68 db(A)	53 db(A)
Assorbimento totale Total absorption	293 W	188 W
Uscita Duct size	220x90 mm	150 mm
Classe energetica Energy class	A (A++/E)	A (A++/E)

Filtro grassi alluminio incluso Grease aluminium Filter included

ACCESSORI ACCESSORIES	
Kit filtrante Recycling kit H30	KIT0148449
Kit filtrante Recycling kit H16	KIT0148450
Radiocomando bianco White remote control	KIT0121468
Radiocomando nero Black remote control	KIT0121469
Motore remoto interno Internal remote motor	KIT0147879
Motore esterno a muro Wall external motor	KIT0147880
Motore esterno a tetto Roof external motor	KIT0147881
Motore esterno a tetto inclinato Inclined Roof external motor	KIT0147882
Dimmer Kit Kit Dimmer	KIT0147878




Radiocomando incluso. Estetiche a pag. 235.
Kit remote control included. See page 235 for available design.



Motori remoti a pag. 223
Remote motor on page 223


MODELLI MODELS

ILLUSION H16 PAINT/A/100	PRF0147726
ILLUSION H16 WH/A/100	PRF0147727
ILLUSION H30 PAINT/A/100	PRF0146250
ILLUSION H30 WH/A/100	PRF0146251
ILLUSION NO MOTOR PAINT/A/100	PRF0146252
ILLUSION NO MOTOR WH/A/100	PRF0146253

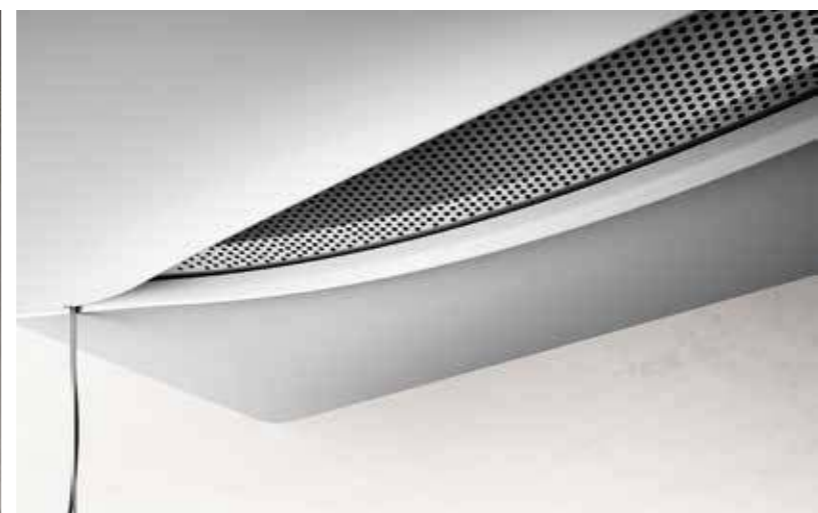

EMPTY SKY

DESIGN FABRIZIO CRISÀ

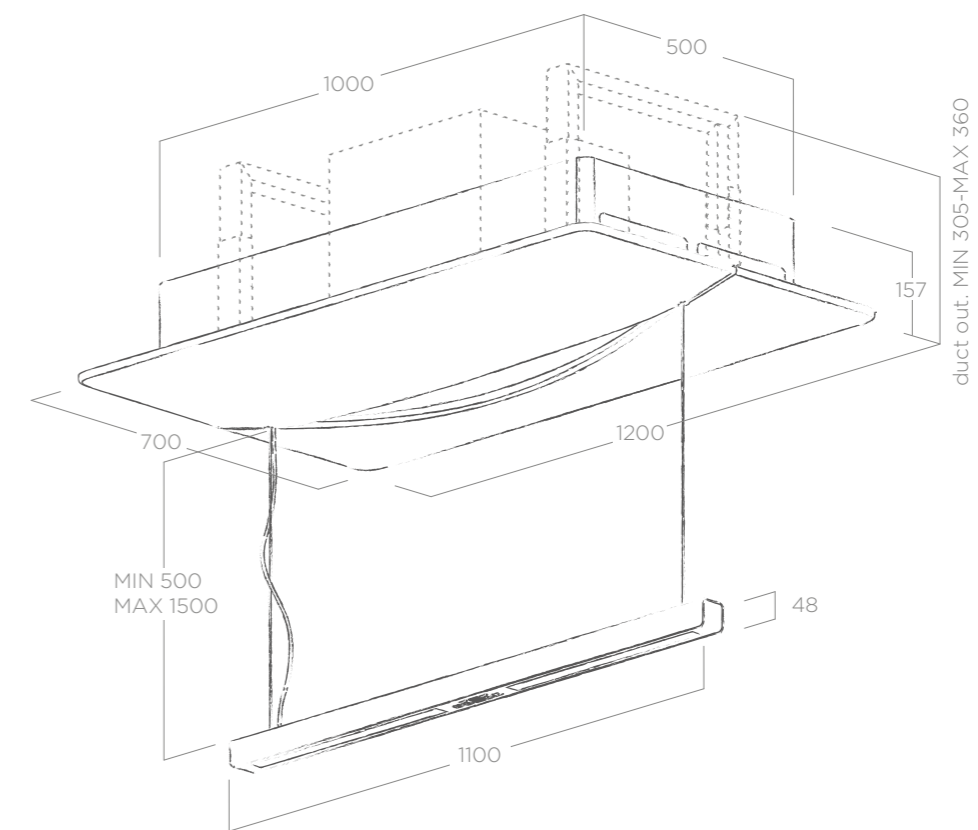

SILENCE



LIGHTING



SPECIAL MATERIAL



ENERGY CLASS

CEILING



REVOLUTION FILTER



DIM LIGHT



SMART INSTALLATION



KG 43,2



KG 52*



Radiocomando incluso. Estetiche a pag. 235.
Kit remote control included. See page 235 for available design.



SENSOR TECNOLOGY SYSTEM
SENSOR TECHNOLOGY SYSTEM

SCHEDA TECNICA TECHNICAL FEATURES

Misure Size	120 x 70 cm
Versione Version	Aspirante/Filtrante Duct-out/Recycling
Finiture Finish	Cristalplant bianco White cristalplant

ILLUMINAZIONE LIGHTING	
Tipo Type	STRIP LED 1 x 7 W
Intensità Intensity	81 LUX
Temperatura Temperature	4000 K

PERFORMANCE PERFORMANCE		
Comandi Controls	Touch Control 3V+I 3S+B Touch Control	(*) Touch Control 3V+I 3S+B Touch Control
Portata intensiva Booster airflow	820 m³/h	555 m³/h
Livello sonoro Noise level	58 db(A)	60 db(A)
Assorbimento totale Total absorption	317 W	267 W
Uscita Duct size	150 mm	---
Classe energetica Energy class	A+ (A**/E)	---

Filtro grassi alluminio incluso Grease aluminium Filter included
Filtro revolution incluso * Revolution filter included *

ACCESSORI ACCESSORIES		
Revolution filter	Revolution filter	CFC0141772
Filtro lunga durata	Long life filter	CFC0141809
Radiocomando bianco	White remote control	KIT0121468
Radiocomando nero	Black remote control	KIT0121469



Cristalplant®, materiale ipoallergenico e non tossico, resistente e piacevole al tatto. Grazie alla spugnetta abrasiva inclusa, ogni tipo di 'aggressione' superficiale può essere rimossa, mantenendo inalterato il suo aspetto nel tempo.
Cristalplant®, a hypoallergenic non-toxic material, resistant and agreeable to the touch. Thanks to the abrasive pad, any kind of surface damage can be easily removed while maintaining its original appearance over time.

MODELLI MODELS		
EMPTY SKY WH/A/120	PRF0120972	
EMPTY SKY WH/F/120 (*)	PRF0120973	

UN NUOVO PUNTO DI LUCE E DI VISTA A NEW POINT OF LIGHT AND VIEW

La gamma Ceiling di Elica, assicura massimo comfort in cucina. Occupa lo spazio naturalmente destinato all'illuminazione della stanza e libera l'ambiente da scomodi ingombri. In questo contesto, la cappa diventa un sistema illuminante, un vero e proprio progetto di luce.

The Ceiling range from Elica, for the greatest comfort in the kitchen. It occupies the space naturally intended to light up the room and frees the area of inconvenient obstructions. In this context, the hood becomes a lighting system, a genuine light project.

TANTA LUCE PER L'AMBIENTE

La fonte di luce a LED ad alta intensità della cappa inonda di luce la cucina e il living con oltre i suoi 1000 Lux.

SO MUCH LIGHT FOR THE AMBIENT

The hood's high-intensity LED light floods the kitchen and living room with light, delivering over 1000 lux.



DIM LIGHT

In ogni istante, la sua luminosità dimmerabile può essere regolata per adattarsi al momento della giornata o all'attività svolta in casa.



DIM LIGHT

At any time, the light can be dimmed to adjust to the time of day or to what's going on at home.



TUNE WHITE

La diffusione della luce, uniforme e ben calibrata, crea atmosfere speciali, rese uniche dalla possibilità di scegliere la tonalità del bianco preferita (2400°K-5000°K).



TUNE WHITE

The uniform, well-calibrated light diffusion creates special settings, made unique by the option of choosing the preferred shade of white (2400°K-5000°K).



LUCE A PORTATA DI MANO

Luci e funzionalità delle nuove Ceiling di Elica sono controllate con il radiocomando. La luce del prodotto e degli accessori lampada, come nel caso di un normale lampadario, possono essere controllate direttamente anche con l'interruttore a parete dell'impianto domestico.

LIGHTING WITHIN REACH

Lights and functionality, from the new Ceiling range from Elica, are controlled by remote control. The light delivered by the product and by the lamp accessories, just like an ordinary light fixture, can be directly controlled even from a light switch on the wall wired into the domestic electrical system.



ACCESSORI LUCE LIGHTING ACCESSORIES

Gli accessori luce Elica si sposano al meglio con i modelli della linea Ceiling. Per ogni kit cavo, completo di portalampada, si può scegliere la lampada preferita per personalizzare al meglio ogni ambiente secondo il proprio gusto.

- √ CONSUMO LAMPADA 5 W
- √ CONSUMO MAX SOSTENUTO DALLA CAPPA 100 W
- √ CONTROLLATE DA TELECOMANDO
- √ CONTROLLATE DA INTERRUTTORE A PARETE
- √ DIMMERABILI (ACCESSORIO OPZIONALE) - KIT0147878

Lighting accessories from Elica are best matched with models from the Ceiling line. For each wiring kit, complete with lamp holder, you can choose your preferred lamp to personalise each environment to your own taste.

- √ LAMP POWER CONSUMPTION 5 W
- √ MAX POWER CONSUMPTION SUSTAINED BY THE HOOD 100 W
- √ REMOTE CONTROL
- √ CONTROLLED BY WALL SWITCH
- √ DIMMABLE (OPTIONAL ACCESSORY) - KIT0147878

LAMPADE LAMPS



LAMPADA LED
EDISON DORATA
LED BULB
GOLDEN EDISON
KIT0147865



LAMPADA LED
TUBOLARE DORATA
LED BULB
GOLDEN TUBULAR
KIT0147866



LAMPADA LED
GLOBO DORATA XXL
LED BULB
GOLDEN SPHERE XXL
KIT0147862



LAMPADA LED
GLOBO TRASPARENTE
LED BULB
TRANSPARENT
KIT0147863



LAMPADA LED
GLOBO DORATA
LED BULB
GOLDEN
KIT0147864



Disponibile per i modelli Lullaby, Illusion, Skydome e Hilight.
Available for models Lullaby Illusion, Skydome e Hilight.

CAVI E PORTALAMPADA WIRING AND LAMP HOLDER



KIT ILLUMINAZIONE GRIGIO RAME
LIGHTING KIT COPPER GRAY



KIT0147867



KIT ILLUMINAZIONE COTONE A RIGHE
LIGHTING KIT STRIPES COTTON



KIT0147873



KIT ILLUMINAZIONE COTONE GREZZO 2XL
LIGHTING KIT RAW COTTON 2XL



KIT0147868



KIT ILLUMINAZIONE EFFETTO SETA
LIGHTING KIT SILK EFFECT



KIT0147874



KIT ILLUMINAZIONE IUTA XL
LIGHTING KIT JUTE XL



KIT0147869



KIT ILLUMINAZIONE IUTA
LIGHTING KIT JUTE



KIT0147875



KIT ILLUMINAZIONE LINO NATURALE XL
LIGHTING KIT NATURAL LINEN XL



KIT0147870



KIT ILLUMINAZIONE LINO GRIGIO NAT
LIGHTING KIT NAT LINEN GRAY



KIT0147876



KIT ILLUMINAZIONE COTONE BICOLORE
LIGHTING KIT BICOLOR COTTON



KIT0147872



KIT ILLUMINAZIONE RAME STAGNATO
LIGHTING KIT TINNED COPPER



KIT0147877

*Lampada non inclusa *Lamp not included

S.E.I. SYSTEM


Dall'esigenza di rendere pratico e sicuro il montaggio dei modelli Ceiling, nasce il nuovo sistema Super Easy Installation di Elica, grazie al quale l'installazione viene portata a termine in pochi e semplici passaggi, in totale sicurezza e salvaguardando sia l'estetica del prodotto che l'integrità della controsoffittatura.

Installing the Ceiling range of models needs to be straightforward and safe. That is why Elica has introduced the new Super Easy Installation system. With this system, installation takes just a few, simple steps in complete safety, ensuring both the product's aesthetics and the integrity of the false ceiling.


- ✓ SEMPLIFICAZIONE DELLE OPERAZIONI
- ✓ RISPARMIO DI TEMPO IN FASE DI INSTALLAZIONE
- ✓ MONTAGGIO SENZA PARTICOLARI UTENSILI
- ✓ MASSIMA SICUREZZA IN TUTTI I PASSAGGI

- ✓ SIMPLIFICATION OF OPERATIONS
- ✓ SAVE TIME WHEN INSTALLING
- ✓ INSTALLATION WITHOUT SPECIAL TOOLS
- ✓ COMPLETE SAFETY IN EVERY STEP

1 AVVICINARE IL PRODOTTO AL VANO NEL CONTROSOFFITTO.
BRING THE PRODUCT TO THE COMPARTMENT IN THE FALSE CEILING.

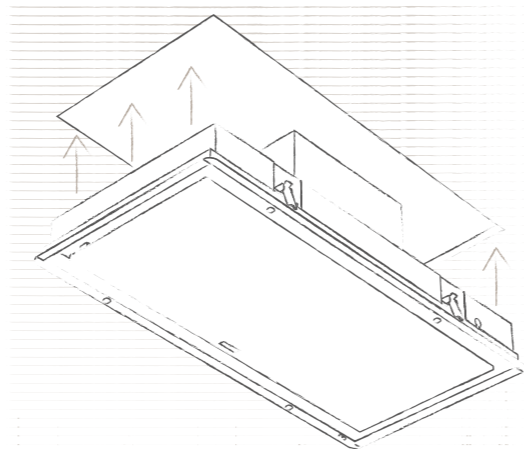


2 SPINGERE IL PRODOTTO NELL'APERTURA PRATICATA.
PUSH THE PRODUCT INTO THE PRACTICAL OPENING.

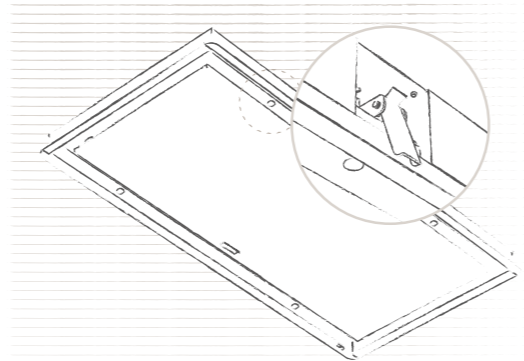

LE STAFFE BLOCCANO IL PRODOTTO NEL CONTROSOFFITTO.
THE BRACKETS HOLD THE PRODUCT IN THE FALSE CEILING.

3 STRINGERE LE VITI PER IL DEFINITIVO FISSAGGIO DEL PRODOTTO.
TIGHTEN THE SCREWS TO DEFINITELY FIX THE PRODUCT.

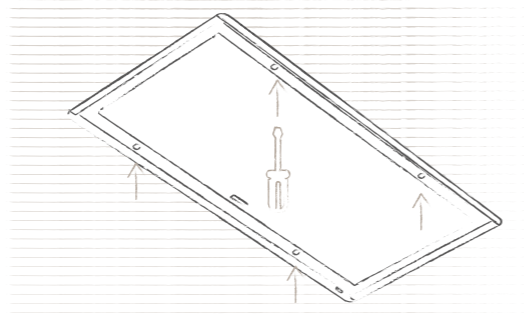

Disponibile per i modelli Illusion, Skydome e Hilight.
Available for models Illusion, Skydome e Hilight.

INSTALLAZIONE SALVASPAZIO SPACE-SAVING INSTALLATION

In caso di ambienti dall'altezza ridotta, non sarà più necessario rinunciare al piacere di scegliere una cappa della gamma Ceiling di Elica. Oltre alla classica versione H30, i modelli in versione H16 sono progettati per essere inseriti in controsoffitti più bassi che permettono di mantenere la massima altezza utile della stanza, senza rinunciare alle performance di una cappa in versione aspirante.

For rooms with limited height, you no longer need to forego the pleasure of selecting an Elica hood from the Ceiling range. In addition to the classic H30 version, models in the H16 version have been designed for use in lower false ceilings. They maintain the maximum useful height of the room without foregoing the performance of an aspiration hood.



INSTALLAZIONE H30 - H30 INSTALLATION




INSTALLAZIONE H16 - H16 INSTALLATION



Nei modelli H30 è prevista la possibilità di uscita su tutti e 5 i lati del box motore, decidendo il lato da collegare al tubo di uscita dell'aria.

In the H30 models, outlets can be run from any of the 5 sides of the engine box, allowing you to decide on which side to attach the air outlet duct.

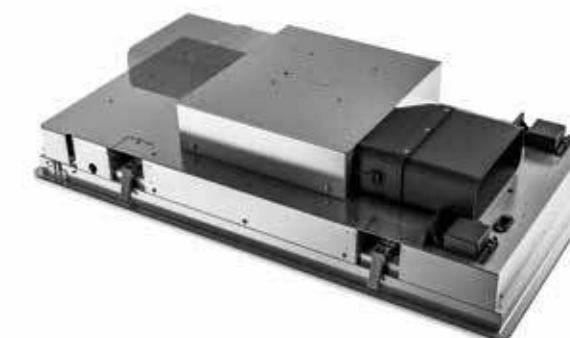

Per la versione H16, al momento dell'installazione della cappa si può decidere se direzionare il tubo di uscita dell'aria a destra o a sinistra.

For the H16 version, the direction of the air outlet pipe, whether to the right or left, can be decided during installation.

HIGHLIGHT	H30	/
ILLUSION	H30	H16
SKYDOME	H30	H16





SUSPENDED



SUMMILUX

DESIGN FABRIZIO CRISÀ

AWARDS



reddot design award
winner 2017



DESIGN
AWARD
2017



EUROPEAN
PRODUCT
DESIGN
AWARD



ICO 2
NICO
AWA 1
RDS 7



INTERIOR
INNOVATION
winner




GOOD
DESIGN



IDA
INTERNATIONAL DESIGN
AWARDS



IDA
DESIGN
AWARDS
winner

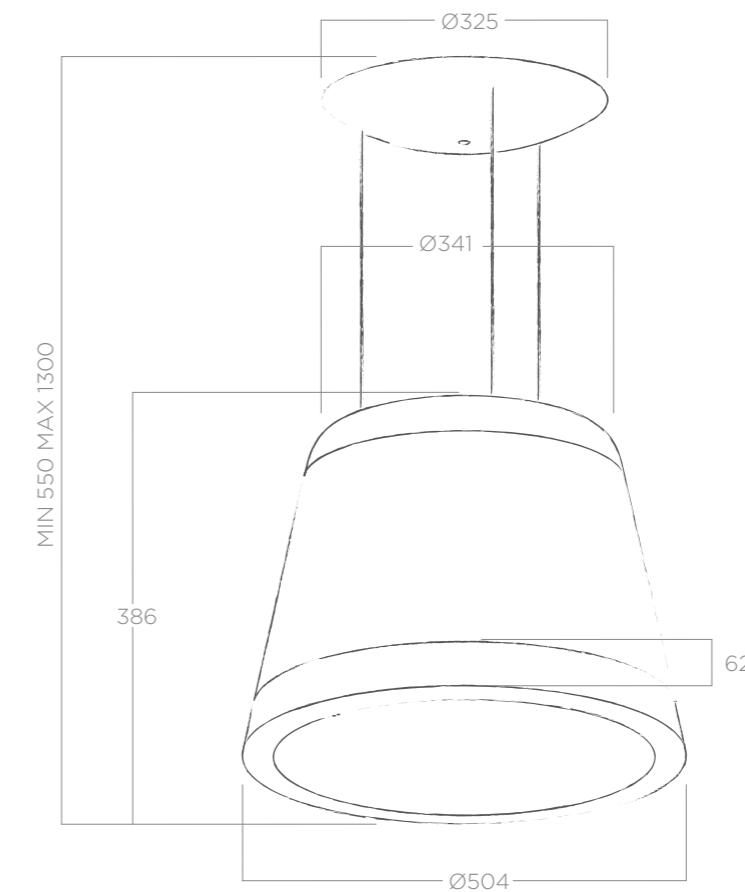

DIM LIGHT



SMART
INSTALLATION



REVOLUTION
FILTER



CM 50



CM 65



LIGHTING



SILENCE



SPECIAL
MATERIAL



ENERGY
CLASS

SCHEDA TECNICA TECHNICAL FEATURES

Misure Size	Ø 50 cm
Versione Version	Filtrante Recycling
Finiture Finish	Vetro + metallo cromato, vetro + metallo effetto rame lucido Glass + chromed metal, glass + polished copper effect metal

ILLUMINAZIONE LIGHTING

Tipo Type	LED 9W + STRIP LED 30 W + STRIP LED 40 W
Intensità Intensity	253 LUX
Temperatura Temperature	3500 K

PERFORMANCE PERFORMANCE

Comandi Controls	Touch Control 3V+I 3S+B Touch Control
Radiocomando Remote control	✓
Portata intensiva Booster airflow	400 m³/h
Livello sonoro Noise level	53 db(A)
Assorbimento totale Total absorption	124 W
Uscita Duct size	150 mm
Classe energetica Energy class	A (A++/E)

Filtro grassi alluminio incluso Grease aluminium Filter included
Filtro lunga durata incluso Long Life filter included

ACCESSORI ACCESSORIES

Revolution filter	Revolution filter	CFC0140053
Filtro lunga durata	Long life filter	CFC0140090
Kit installazione a parete cromato	Chrome wall mounted kit	KIT0146156
Kit installazione a parete rame	Copper wall mounted kit	KIT0146157
Kit prolunga cavi (5m)	Extension cable kit (5m)	KIT0112772
Radiocomando bianco	White remote control	KIT0121468
Radiocomando nero	Black remote control	KIT0121469



Radiocomando incluso. Estetiche a pag. 235.
Kit remote control included. See page 235 for available design.



Installabile anche a muro ordinando il kit installazione accessorio.
Possibility for wall mounting by ordering the ancillary installation kit.

MODELLI MODELS

SUMMILUX COPPER/F/50	PRF0151811
SUMMILUX IX/F/50	PRF0151810



SUSPENDED